


Step 11

Turn power back on and enjoy your Nelson Bubble Lamp.




For more information about the care and assembly of this product, please visit [hermanmiller.com/care-and-assembly](http://hermanmiller.com/care-and-assembly).  
HermanMiller and  are among the registered trademarks of Herman Miller, Inc.  
Nelson is among the trademarks of Herman Miller, Inc.  
Printed in USA. Please recycle.  
© 2016 Herman Miller, Inc., Zeeland Michigan. All rights reserved.

HermanMiller  
Nelson™ Bubble Lamp Pendants




How to install your lamp

Tools Required

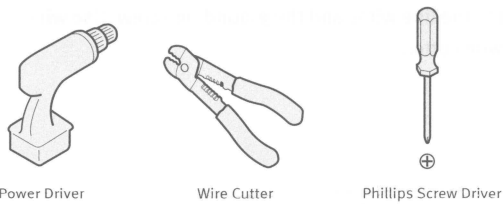

Step 1


Prepare your parts and mounting location.

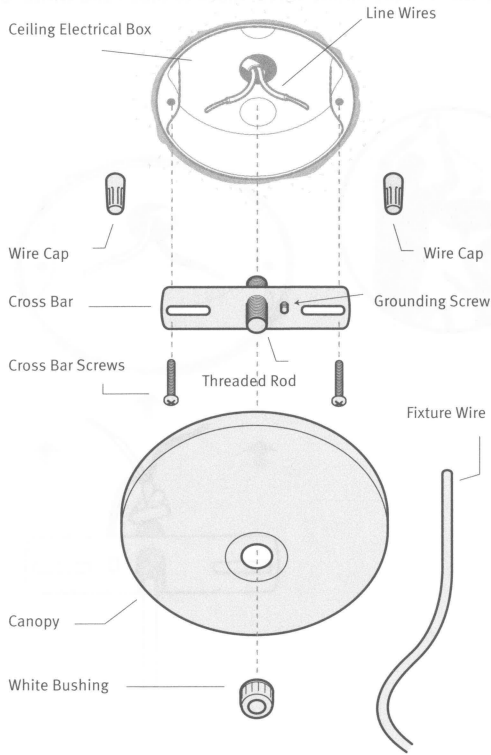

THIS PRODUCT MUST BE INSTALLED IN ACCORDANCE WITH THE APPLICABLE INSTALLATION CODE BY A PERSON FAMILIAR WITH THE CONSTRUCTION AND OPERATION OF THE PRODUCT AND THE HAZARDS INVOLVED.

PLEASE REMOVE LAMP FROMBAG BEFORE USE.  
PLEASE REMOVE BRAND MEDALLION FROM PRODUCT BEFORE USE.

Parts Included

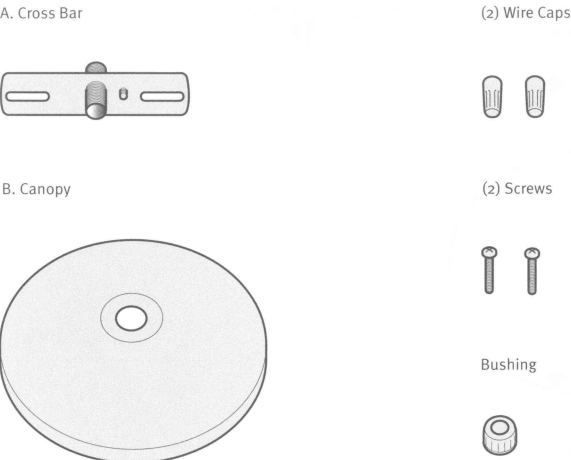


2.1

Disconnect all power. Be 100 percent sure power is off before starting. Turn off circuit breakers and wall switch to the fixture supply line leads.


DANGER:

Failure to disconnect power supply prior to installation may result in serious injury or death.

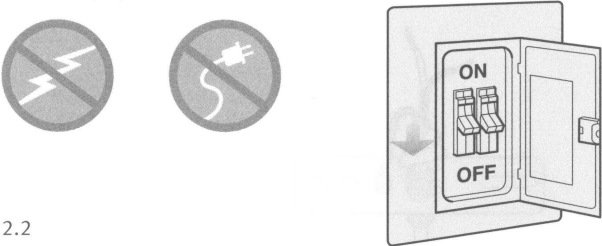


2.2

Using wire cutter, cut fixture wire to desired length.

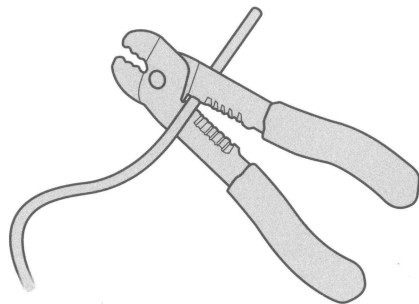


Step 3

Run fixture wire up through components in the order you see below. Leave about 5.5 inches of wire above the threaded rod. Now make a knot in the wire to act as strain releif. This should leave you with about 3.5 inches for step 4.

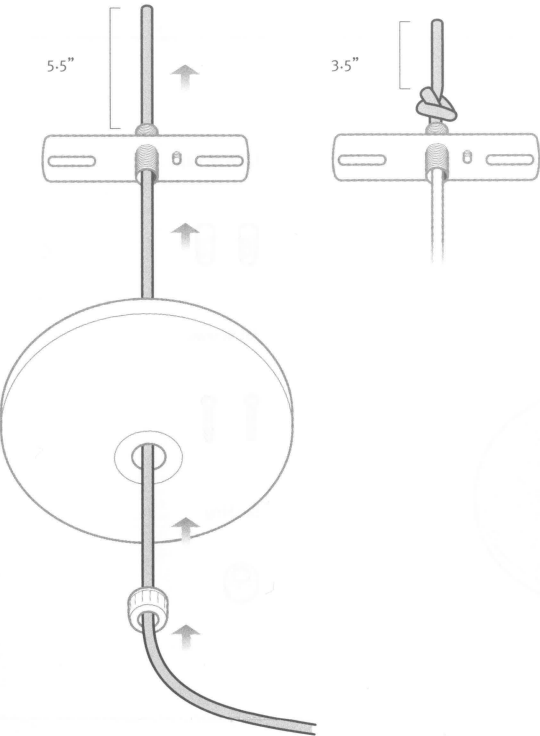


Step 5

Connect the green ground wire to the grounding screw.

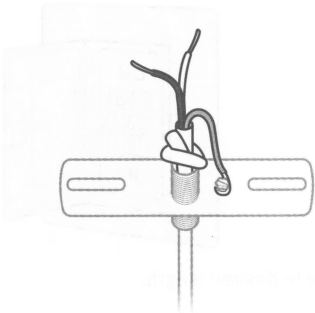

Step 4


4.1  
Using wire cutter, cut and strip off 3 inches of the wire casing on the fixture wire to expose the line wire, the neutral wire and ground wire.

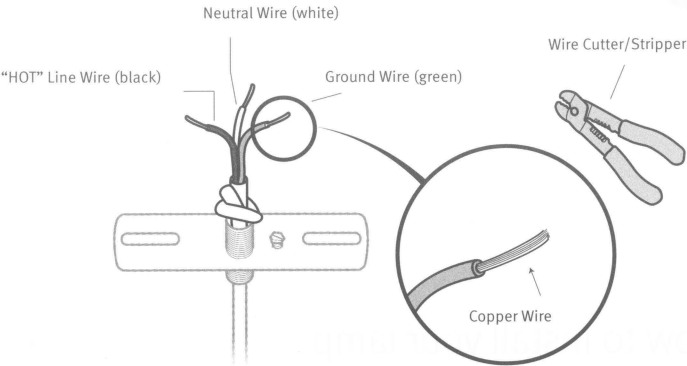

4.2  
Strip .75 inches of the casing on these three wires to expose the copper wire you will use to connect to the line wires and the grounding screw. Use wire stripper feature on the wire cutter.


Step 6

Have someone support the lamp shade, canopy and bushing while you connect the line wires to the fixture wires, black to black and white to white.

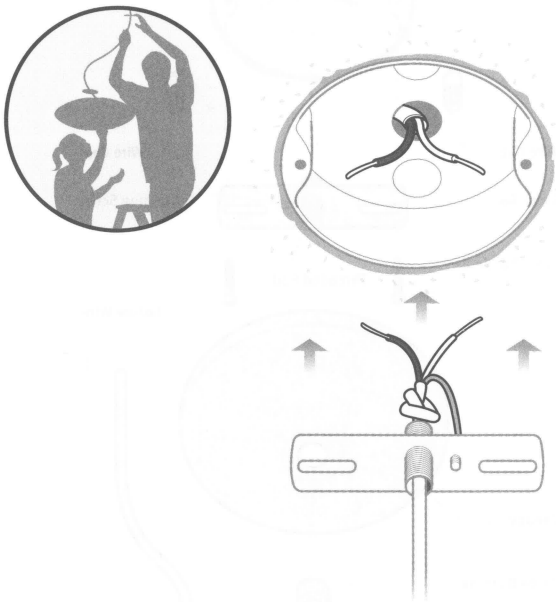


Step 7

Thoroughly and uniformly twist the copper wiring together to ensure a good connection to the line wire.

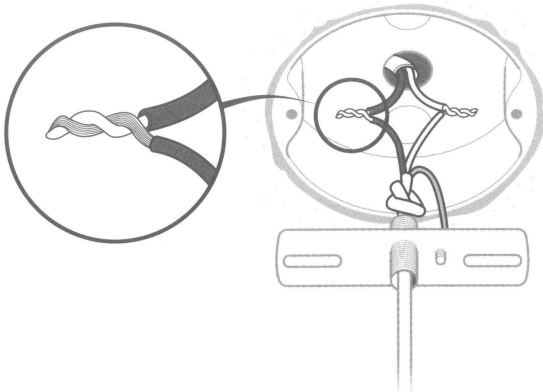


Step 9

9.1  
Attach cross bar to the electrical box.

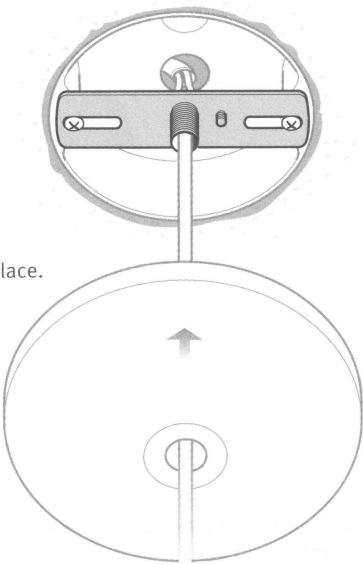


9.2  
Slide canopy in place.

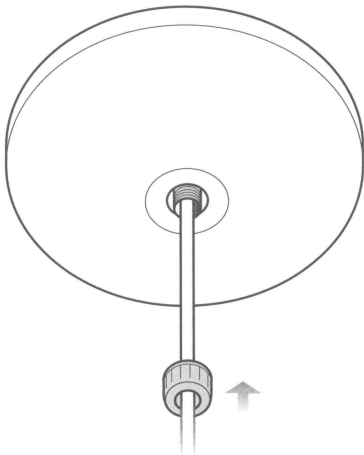

Step 8

Twist the wire caps over the connected copper wiring and make sure the two sets of connected wires are kept apart.

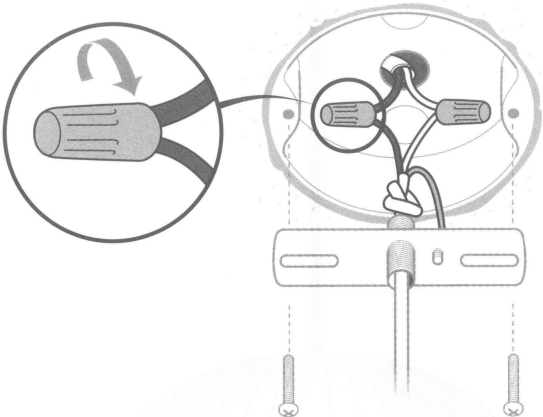

Step 10

Once the canopy is flush against the ceiling, slide the white bushing up and attach it to the threaded rod.